



LYNGDORF SB-75

PASSIVE STEREO SOUNDBAR

The Lyngdorf SB-75 combines the sound performance of two high-end stereo speakers with the simplicity and elegance of a single soundbar. Designed to be placed on-wall below a large TV or screen, it delivers a wide soundstage and a powerful sound for both movies and music.

THE BEST OF BOTH WORLDS


The SB-75 combines the best of both worlds: The small footprint of an on-wall soundbar and the music and movie experience from real high-end speakers and a good amplifier. It is a passive full-range stereo speaker, equipped with high-performance drive-units in a very shallow yet rigid cabinet, tuned for best sound performance close to a wall. This provides high power efficiency and a high maximum volume level. The SB-75 combines elegant design with a room filling listening experience – offering the sound performance of a pair of loudspeakers in a discreet, space saving solution.

INSTALLATION-FRIENDLY AND CUSTOMIZABLE

The Lyngdorf SB-75 has been specially designed for easy wall mounting and comes with an integrated wall mount bracket. The shallow cabinet is both easy to install and stylish: The extra-matt black finish lets the speaker disappear in dark cinema rooms or behind a sound-transparent screen, while the rounded edges and the elegant fabric cover in midnight-grey color allow an easy integration in media rooms and living rooms. Additional to the SB-75 standard version other custom widths and colors can be ordered to suit any room and screen size.

HIGHLIGHTS

- High-end stereo speaker performance in the shape of a soundbar
- Four powerful midrange drivers / woofers and two soft dome tweeters
- Shallow, rigid, and installation-friendly on-wall construction
- Suited for 75" and 77" screens; other cabinet widths available on special order

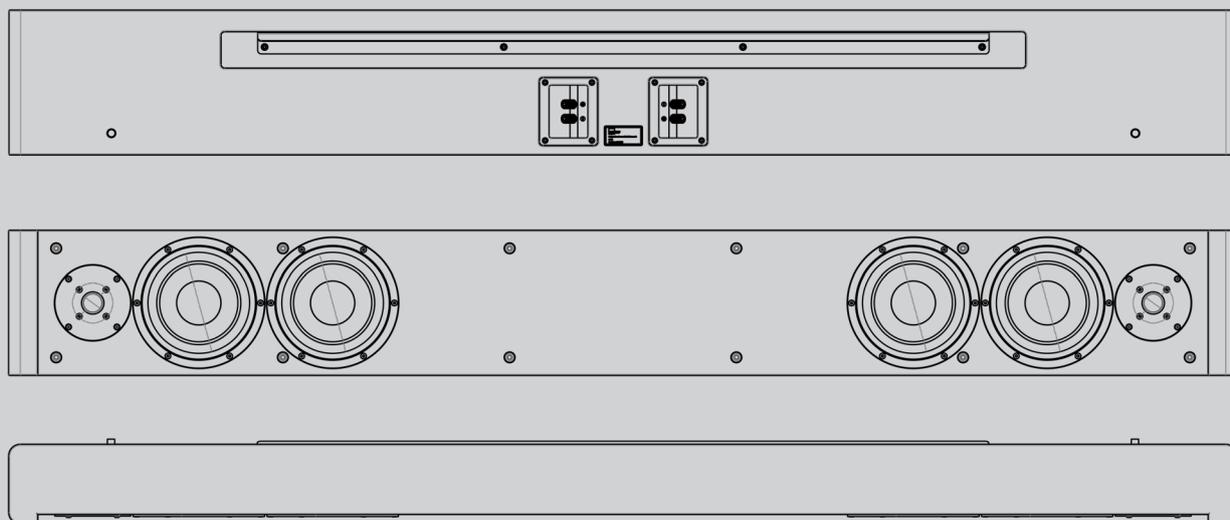

SPECIFICATIONS

Description:	2 x 2-way speaker (stereo soundbar)
Power handling:	250 W (IEC)
Tweeter:	2 x 28mm / 1,1" Fabric soft dome
Midrange driver:	4 x 180 mm / 6,5", 35mm voice coil, cone material: aluminum, die-cast basket, vented magnet
Frequency response:	57 – 20.000 Hz (-3dB)
Enclosure:	MDF construction, closed cabinet
Nominal impedance:	4 Ohm
Maximum SPL:	117 dB (1m, peak)
Sensitivity:	92 dB (2.83V/1m)
Crossover frequency:	2.200 Hz
Connections:	Binding posts (2 pairs; one for left and one for right channel)
Placement:	On-wall with supplied wall-mount bracket
Dimensions (W x H x D):	168,0 x 20 x 11 cm (11.6 cm with wall mount bracket) 66 x 7.9 x 4.3 inches (4.6 inches with wall mount bracket)
Weight:	28 kg / 62 lb
Finishes:	Ultra matte black, detachable fabric grille in midnight grey