



# ARENA 10

## Frequency Response

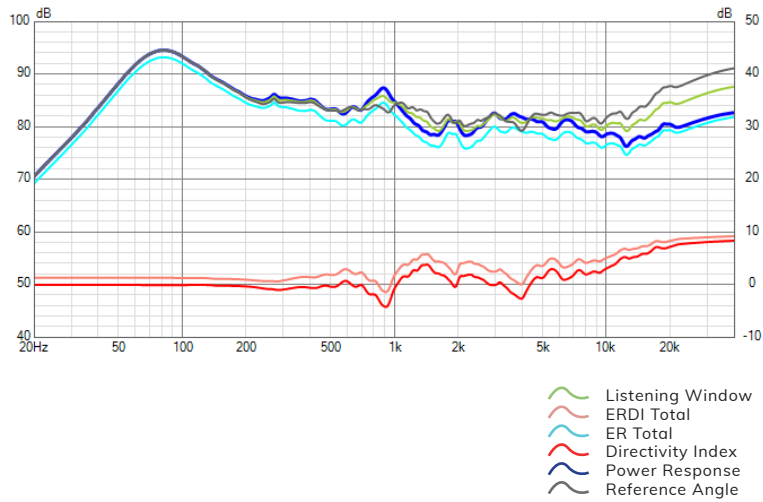

## Impedance Amplitude and Phase

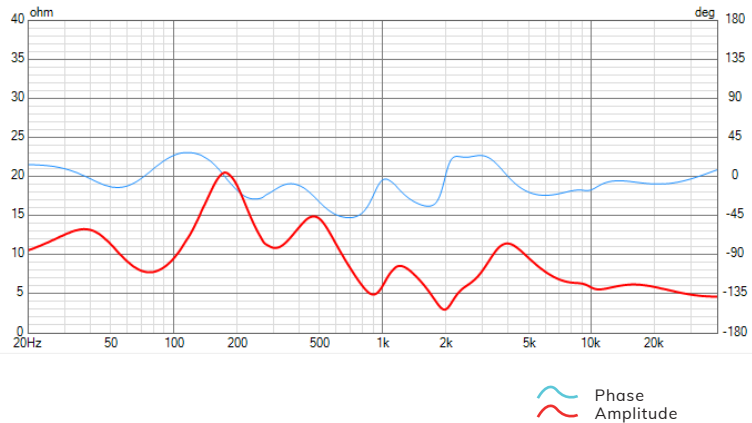


Arena 10, the 3-way speaker boasts the renowned Voice of Sonus faber, being a versatile solution for in-wall and in-ceiling usage. Second option of Arena 30 for residential system.



## Technical Specifications

Speaker type	3,0 Way	
Low frequency transducer	4 x 6,5 inch	
Mid/High frequency transducer	1 x 6,25 inch 19 mm Tw	
Maximum recommended power	400 W	
Low-frequency cut-off (-6dB)	36 Hz	33.58 kHz
Frequency Response (-3dB on-axis)	40,0 Hz	31.58 k Hz
Max SPL 1 Meter	111,0 dB	
Sensitivity 2.83 Vrms@1m	88,5 dB	
Nominal Impedance	4 Ω	
Minimal impedance	3,5 Ω	
Crossover frequencies	250 Hz / 2100 Hz	
Enclosure type	Closed Box	
Mounting Depth	150,0 mm	
Weight	25 kg - 55 lb	
Depth	150 mm - 5,9 in	
Width	590 mm - 23,2 in	
Height	590 mm - 23,2 in	

## Horizontal Contour Plot (normalized)

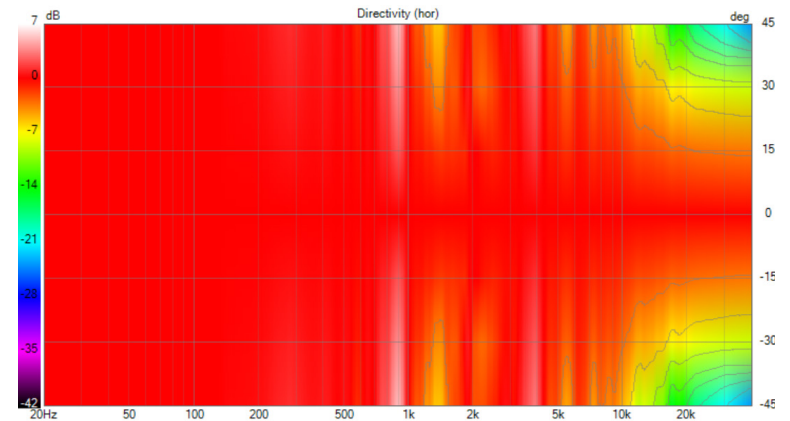

## Time Spectral Decay

